


## SPECIFICATIONS

(Typical values stored at 20°C for one year)

◆ Nominal capacity	3.6Ah
(at 3.0mA/20°C/68°F/2.0V cut-off)	
◆ Nominal voltage	3.6V
◆ Max. recommended continuous current	60mA
(Higher current can be available upon consulting)	
◆ Max. pulse current capability ★	150mA
◆ Operating temperature range	-55 ~+85°C
◆ Lithium metal content	approx. 0.95g
◆ Weight	24g
◆ Volume	10.6cm <sup>3</sup>
◆ UL Approval	MH28122

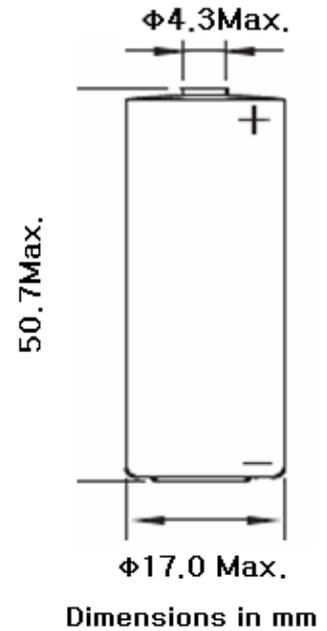




### Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector

### Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

**Max Pulse Capability:** Maximum Pulse capability reading over 3.0V at 150mA/0.1sec. every 2 min. at +20°C, 10 $\mu$ A / cm<sup>2</sup> base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

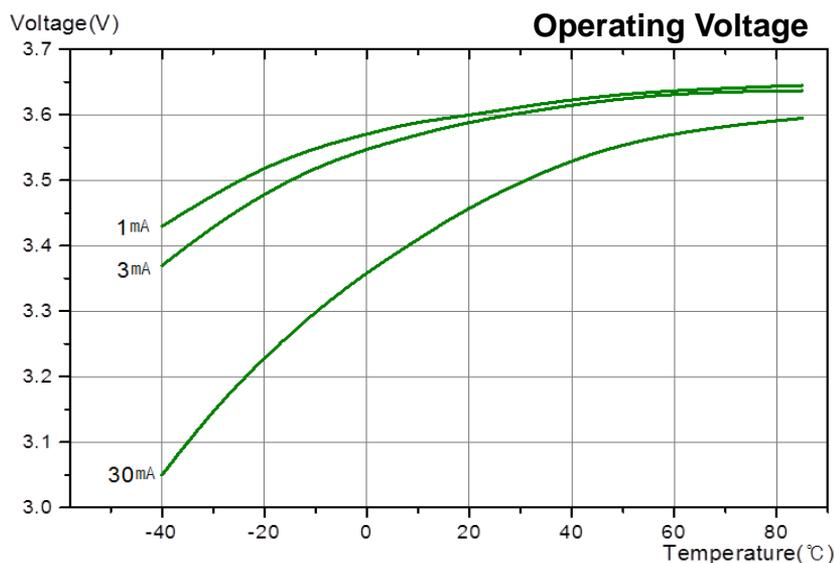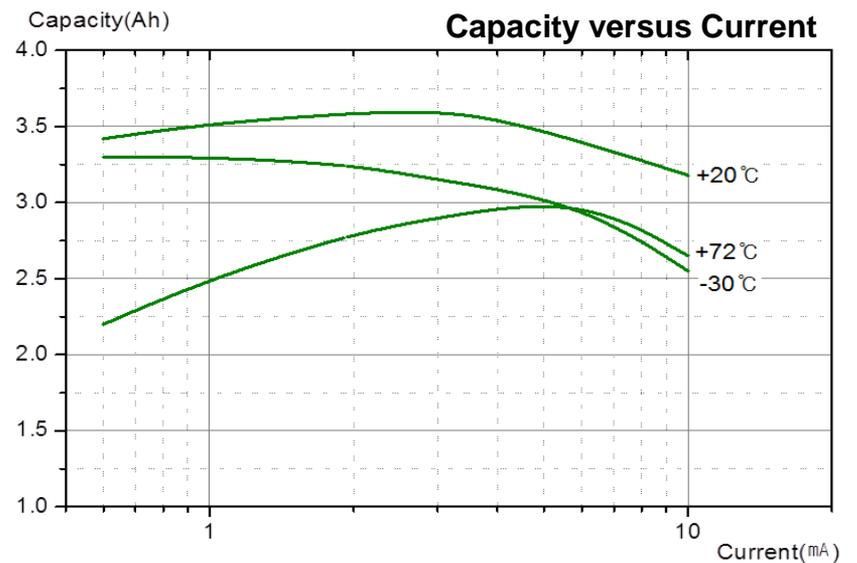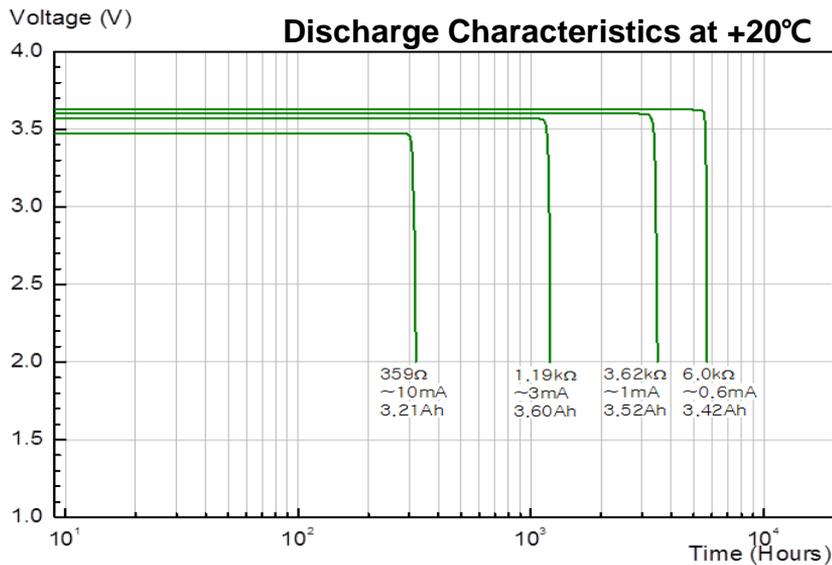

### Standards

- Safety: UL 1642, IEC 60086-4, IEC 60079-11
- Transport: UN 3090
- Quality: ISO 9001, ISO 14001, IATF 16949
- Environment: RoHS, REACH