


SPECIFICATIONS

(Typical values stored at 20°C for one year)

◆ Nominal capacity	2.6Ah
(@ 1mA/20°C/68°F/2.0V Cut-Off)	
◆ Nominal voltage	3.6V
◆ Max. recommended continuous Current	60mA
(Higher current can be available upon consulting)	
◆ Max. pulse current capability ★	200mA
◆ Operating Temperature Range	-55 ~ 85°C
◆ Lithium metal content	approx. 0.7g
◆ Weight	17g
◆ Volume	8.0cm ³
◆ UL Approval	MH28122

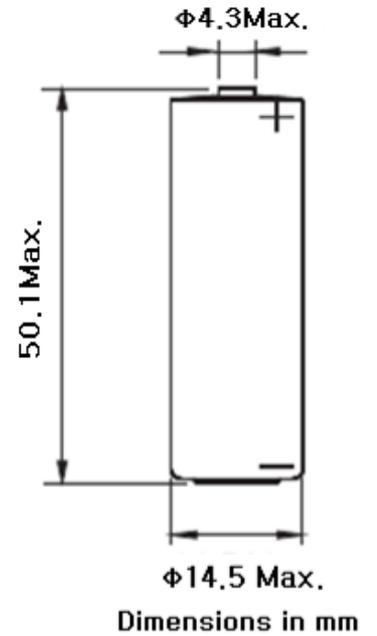




Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector

Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

Max Pulse Capability: Maximum Pulse capability reading over 3.0V at 200mA/0.1sec. every 2 min. at +20°C, 10μA/cm² base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

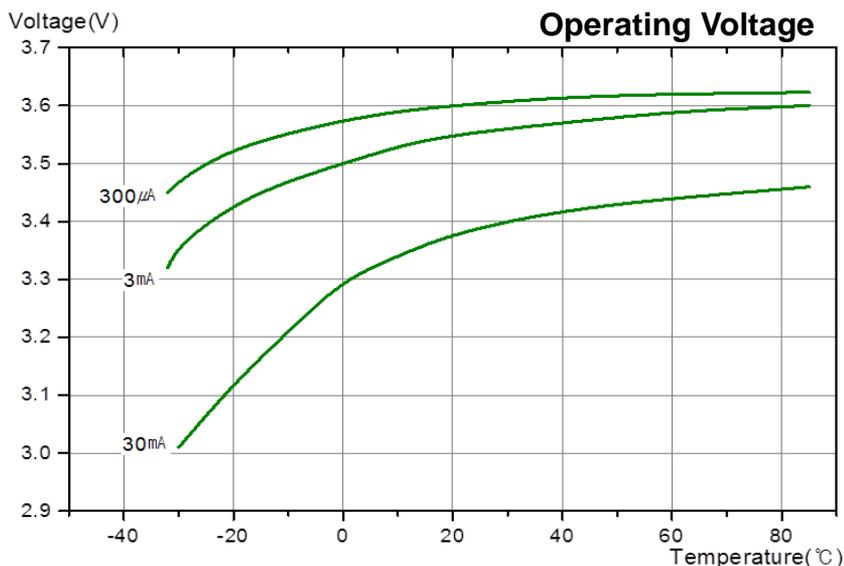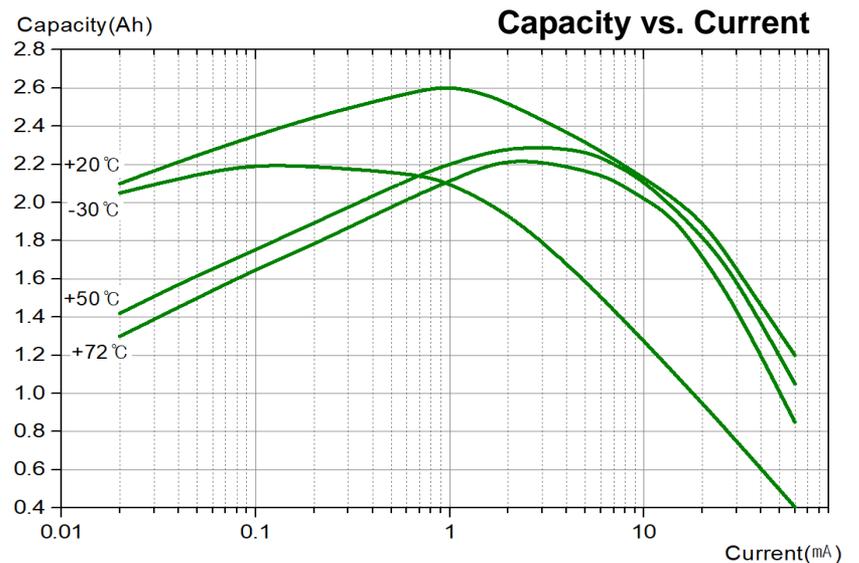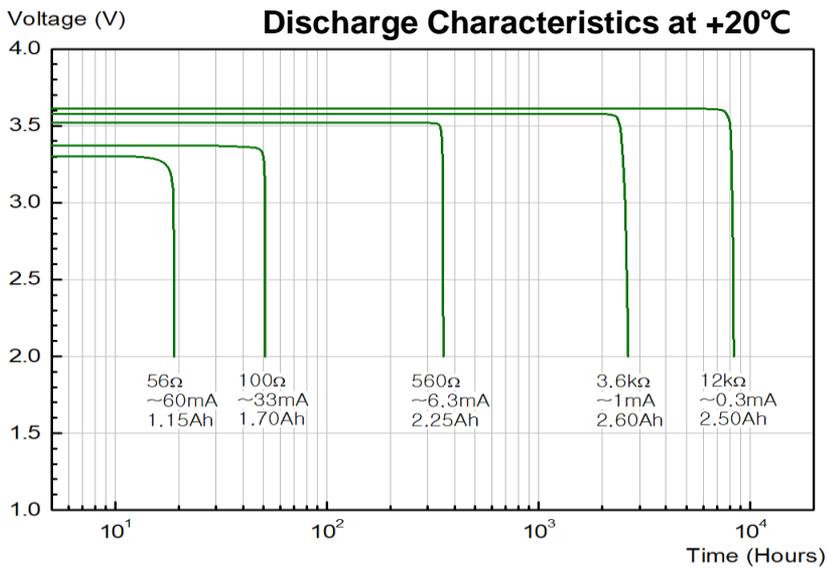

Standards

- Safety: UL 1642, IEC 60086-4, IEC 60079-11
- Transport: UN 3090
- Quality: ISO 9001, ISO 14001, IATF 16949
- Environment: RoHS, REACH