


## SPECIFICATIONS

(Typical values stored at 20°C for one year)

◆ Nominal capacity (at 1mA/20°C/68°F/2.0V cut-off)	1.2Ah
◆ Nominal voltage	3.6V
◆ Max. recommended continuous current (Higher current can be available upon consulting)	30mA
◆ Max. pulse current capability ★	60mA
◆ Operating temperature range	-55 ~+85°C
◆ Lithium metal content	approx. 0.3g
◆ Weight	9g
◆ Volume	4.3cm <sup>3</sup>
◆ UL Approval	MH28122

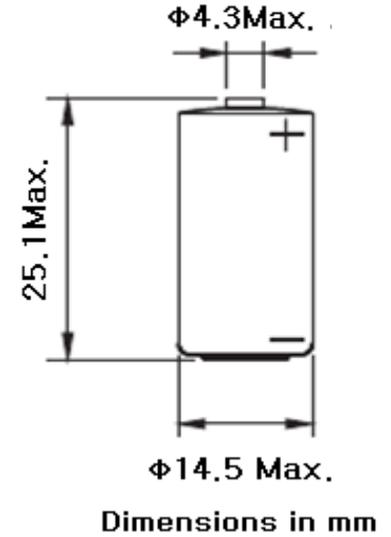




### Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector, Case1, Case2

### Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

**Max Pulse Capability:** Maximum Pulse capability reading over 3.0V at 60mA/0.1sec. every 2 min. at +20°C, 10μA / cm<sup>2</sup> base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

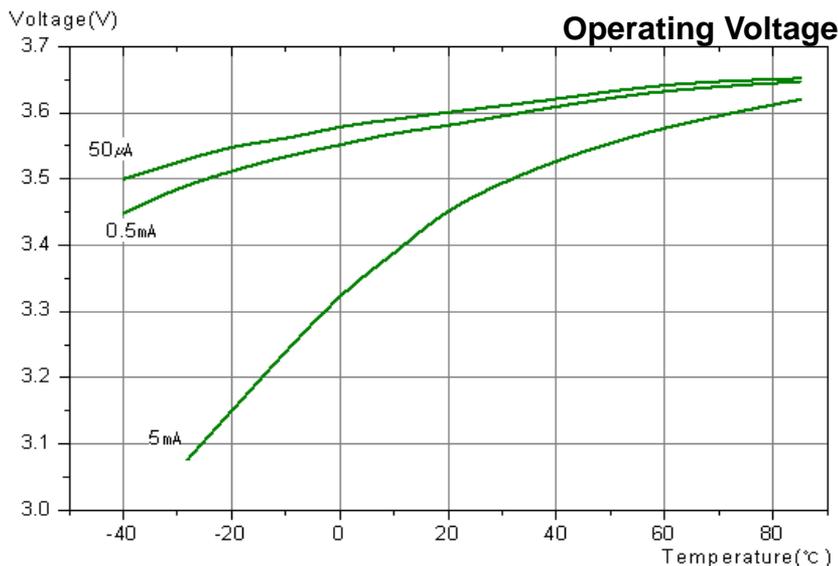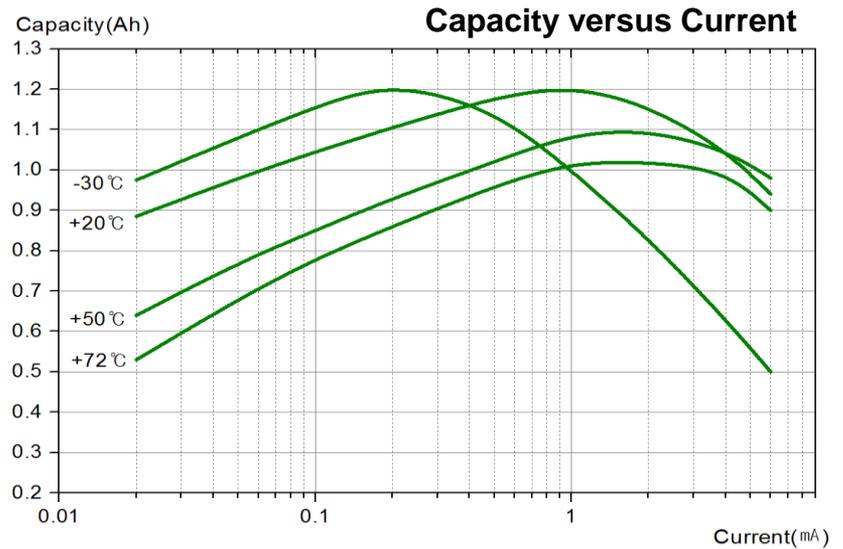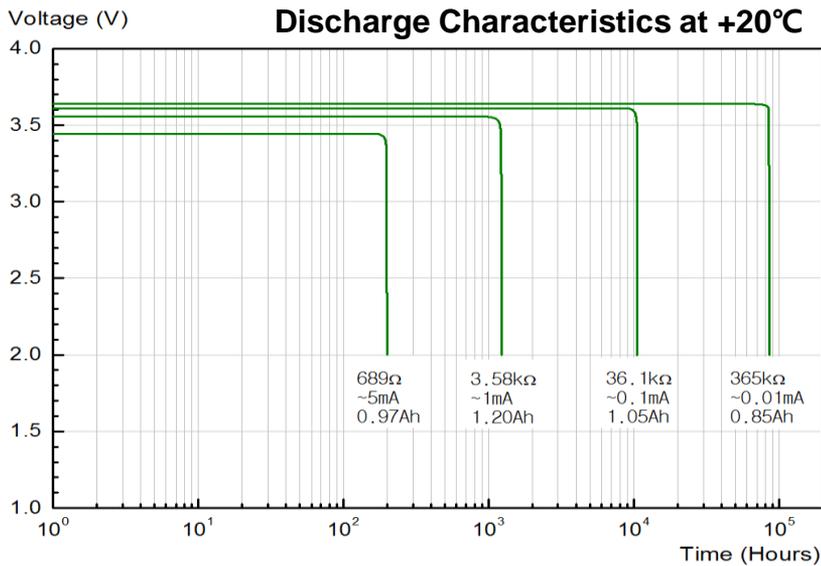

### Standards

- Safety: UL 1642, IEC 60086-4, IEC 60079-11
- Transport: UN 3090
- Quality: ISO 9001, ISO 14001, IATF 16949
- Environment: RoHS, REACH