


SPECIFICATIONS

(Typical values stored at 20°C for one year)

◆ Nominal capacity (at 1mA/20°C/68°F/2.0V cut-off)	1.65Ah
◆ Nominal voltage	3.6V
◆ Max. recommended continuous current (Higher current can be available upon consulting)	40mA
◆ Max. pulse current capability ★	90mA
◆ Operating temperature range	-55 ~+85°C
◆ Lithium metal content	approx. 0.5g
◆ Weight	12g
◆ Volume	5.5cm ³
◆ UL Approval	MH28122

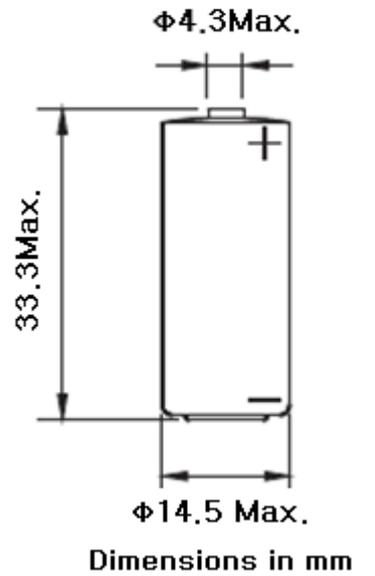




Max Pulse Capability: Maximum Pulse capability reading over 3.0V at 90mA/0.1sec. every 2 min. at +20°C, 10μA / cm² base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector

Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

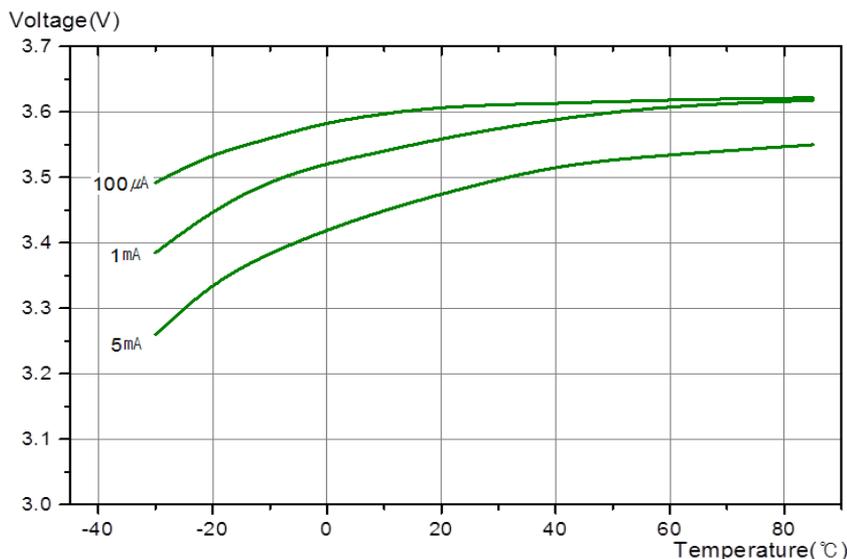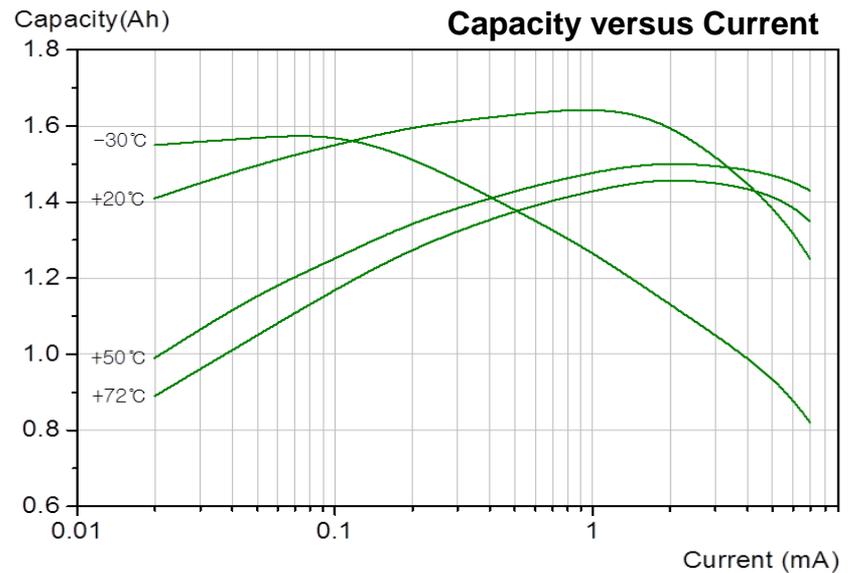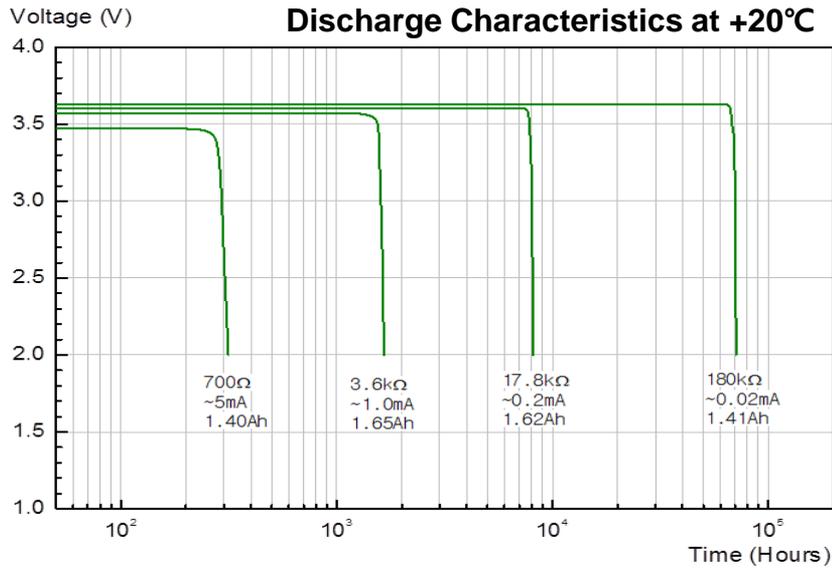

Standards

- Safety: UL 1642, IEC 60079-11
- Transport: UN 3090
- Quality: ISO 9001, ISO 14001, IATF 16949
- Environment: RoHS, REACH